

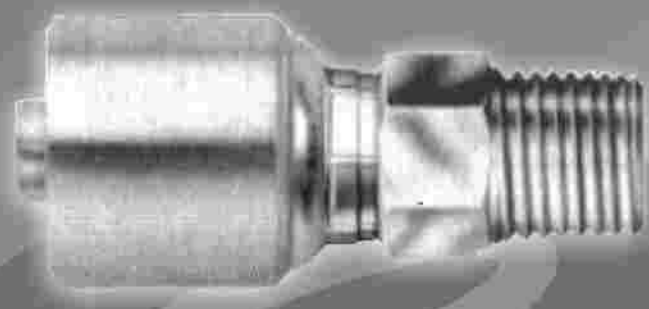


**Terminais Prensáveis MegaCrimp®
para Mangueiras
Trançadas de Média e Alta Pressão**



Macho Fixo NPTF 30°



Terminal Prensável
MegaCrimp®





Descrição	Diâmetro Interno da Mangueira (DI)		Rosca FPP	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-2MP	1/4	6,35	1/8-27	12,7	50,0	24,0
4G-4MP	1/4	6,35	1/4-18	14,3	52,5	26,5
4G-6MP	1/4	6,35	3/8-18	17,4	54,0	28,0
4G-8MP	1/4	6,35	1/2-14	22,2	61,0	35,0
6G-4MP	3/8	9,53	1/4-18	15,8	58,0	30,1
6G-6MP	3/8	9,53	3/8-18	17,4	55,5	27,6
6G-8MP	3/8	9,53	1/2-14	22,2	62,5	34,6
8G-6MP	1/2	12,7	3/8-18	20,6	66,0	28,5
8G-8MP	1/2	12,7	1/2-14	22,2	71,5	34,0
8G-12MP	1/2	12,7	3/4-14	27,0	74,0	36,5
10G-8MP	5/8	15,8	1/2-14	23,8	74,0	36,5
10G-12MP	5/8	15,8	3/4-14	27,0	73,5	36,0
12G-8MP	3/4	19,0	1/2-14	27,0	88,0	37,0
12G-12MP	3/4	19,0	3/4-14	27,0	88,0	37,0
12G-16MP	3/4	19,0	1-11.1/2	34,9	92,5	41,5
16G-12MP	1	25,4	3/4-14	34,9	100,0	43,2
16G-16MP	1	25,4	1-11.1/2	34,9	104,0	47,7
20G-20MP	1.1/4	31,7	1.1/4-11.1/2	44,4	112,0	53,0

Macho Fixo "O" Ring



Terminal Prensável
MegaCrimp®



Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4MB	1/4	6,35	7/16-20	14,3	48,0	22,0
4G-5MB	1/4	6,35	1/2-20	15,8	46,5	20,5
4G-6MB	1/4	6,35	9/16-18	17,4	51,0	25,0
6G-6MB	3/8	9,53	9/16-18	17,4	52,5	24,5
6G-8MB	3/8	9,53	3/4-16	22,2	55,0	27,1
6G-10MB	3/8	9,53	7/8-14	25,4	56,5	28,6
8G-12MB	3/8	9,53	1.1/16-12	31,7	61,5	33,6
8G-8MB	1/2	12,7	7/8-14	22,2	64,5	27,0
8G-10MB	1/2	12,7	7/8-14	25,4	65,5	28,0
8G-12MB	1/2	12,7	1.1/16-12	31,7	70,5	33,0
10G-8MB	5/8	15,8	3/4-16	25,4	68,0	30,5
10G-10MB	5/8	15,8	7/8-14	25,4	67,0	29,5
10G-12MB	5/8	15,8	1.1/16-12	31,7	70,5	33,0
12G-12MB	3/4	19,0	1.1/16-12	31,7	83,5	32,5
12G-14MB	3/4	19,0	1.3/16-12	34,9	84,0	33,0
12G-16MB	3/4	19,0	1.5/16-12	38,1	87,5	36,5
16G-16MB	1	25,4	1.5/16-12	38,1	94,5	37,7
20G-20MB	1.1/4	31,7	1.5/8-12	47,6	97,0	38,0

**Terminal Prensável
MegaCrimp®**
Macho Fixo JIC 37°


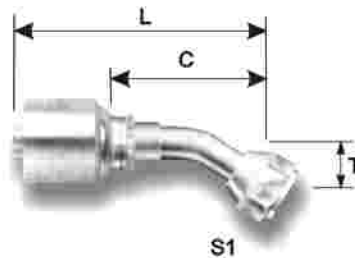

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	L (mm)	C (mm)
	(pol)	(mm)				
4G-4MJ	1/4	6,35	7/16-20	12,7	54,5	28,5
4G-5MJ	1/4	6,35	1/2-20	12,7	54,5	28,5
4G-6MJ	1/4	6,35	9/16-18	14,3	52,5	26,5
6G-6MJ	3/8	9,53	9/16-18	15,8	57,0	29,1
6G-8MJ	3/8	9,53	3/4-16	19,0	58,5	30,6
8G-8MJ	1/2	12,7	3/4-16	20,6	68,0	30,5
8G-10MJ	1/2	12,7	7/8-14	22,2	70,5	33,0
8G-12MJ	1/2	12,7	1.1/16-12	27,0	75,5	38,0
10G-10MJ	5/8	15,8	7/8-14	23,8	76,0	38,5
10G-12MJ	5/8	15,8	1.1/16-12	27,0	75,5	38,0
12G-12MJ	3/4	19	1.1/16-12	27,0	93,0	42,0
12G-16MJ	3/4	19,0	1.5/16-12	33,3	92,0	41,0
16G-16MJ	1	25,4	1.5/16-12	34,9	104,5	47,7
20G-20MJ	1.1/4	31,7	1.5/8-12	44,4	111,5	52,5

**Terminal Prensável
MegaCrimp®**
Fêmea Giratória JIC 37°


Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	Sextavado S2 (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-4FJX	1/4	6,35	7/16-20	12,7	14,3	53,4	27,4
4G-5FJX	1/4	6,35	1/2-20	12,7	17,4	56,2	30,2
4G-6FJX	1/4	6,35	9/16-18	14,3	19,0	56,3	30,2
6G-5FJX	3/8	9,53	1/2-20	15,8	17,4	56,7	28,8
6G-6FJX	3/8	9,53	9/16-18	15,8	19,0	58,8	30,2
6G-8FJX	3/8	9,53	3/4-16	17,4	22,2	63,1	35,1
8G-6FJX	1/2	12,7	9/16-18	20,6	19,0	66,8	29,3
8G-8FJX	1/2	12,7	3/4-16	20,6	22,2	71,6	34,1
8G-10FJX	1/2	12,7	7/8-14	20,6	27,0	75,1	37,7
8G-12FJX	1/2	12,7	1.1/16-12	25,4	31,7	79,0	41,5
10G-8FJX	5/8	15,8	3/4-16	23,8	22,2	73,6	36,1
10G-10FJX	5/8	15,8	7/8-14	23,8	27,0	77,1	39,7
10G-12FJX	5/8	15,8	1.1/16-12	25,4	31,7	78,5	41,0
10G-14FJX	5/8	15,8	1.3/16-12	28,5	34,9	79,7	42,2
12G-10FJX	3/4	19,0	7/8-14	27,0	27,0	89,1	38,1
12G-12FJX	3/4	19,0	1.1/16-12	27,0	31,7	93,5	42,5
12G-16FJX	3/4	19,0	1.5/16-12	31,7	38,1	96,0	45,0
16G-12FJX	1	25,4	1.1/16-12	34,9	31,7	101,0	44,2
16G-16FJX	1	25,4	1.5/16-12	34,9	38,1	106,0	49,2
16G-20FJX	1	25,4	1.5/8-12	39,7	50,8	109,9	53,1
20G-20FJX	1.1/4	31,7	1.5/8-12	44,4	50,8	116,4	57,4
20G-24FJX	1.1/4	31,7	1.7/8-12	47,6	57,1	122,7	63,7

Fêmea Giratória JIC 37° - Curva 45°



Terminal Prensável
MegaCrimp®





Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-4FJX45	1/4	6,35	7/16-20	14,3	11,9	58,0	32,0
4G-5FJX45	1/4	6,35	1/2-20	15,8	14,2	65,0	39,0
4G-6FJX45	1/4	6,35	9/16-18	17,4	14,2	69,4	43,4
6G-6FJX45	3/8	9,53	9/16-18	17,4	14,2	73,9	48,0
6G-8FJX45	3/8	9,53	3/4-16	22,2	17,5	73,1	45,2
8G-8FX45	1/2	12,7	3/4-16	22,2	17,5	84,1	46,6
8G-10FJX45	1/2	12,7	7/8-14	25,4	19,1	91,9	54,4
10G-10FJX45	5/8	15,8	7/8-14	25,4	19,1	91,5	54,0
10G-12FJX45	5/8	15,8	1.1/16-12	31,7	26,9	105,0	67,5
12G-12FJX45	3/4	19,0	1.1/16-12	31,7	26,9	124,2	73,2
16G-16FJX45	1	25,4	1.5/16-12	38,1	29,5	134,6	77,8

Fêmea Giratória JIC 37° - curva 90°

Terminal Prensável
MegaCrimp®




Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-4FJX90S	1/4	6,35	7/16-20	14,3	17,3	57,3	31,3
4G-4FJX90L	1/4	6,35	7/16-20	14,3	45,7	52,2	26,2
4G-5FJX90S	1/4	6,35	1/2-20	15,8	19,6	59,0	33,0
4G-6FJX90S	1/4	6,35	9/16-18	17,4	21,6	63,9	37,9
6G-6FJX90S	3/8	9,53	9/16-18	17,4	21,6	66,0	38,1
6G-6FJX90L	3/8	9,53	9/16-18	17,4	55,4	58,9	31,0
6G-8FJX90S	3/8	9,53	3/4-16	22,2	27,7	69,7	41,8
6G-8FJX90L	3/8	9,53	3/4-16	22,2	61,7	64,4	36,5
8G-8FJX90S	1/2	12,7	3/4-16	22,2	27,7	80,3	42,9
8G-8FJX90L	1/2	12,7	3/4-16	22,2	61,7	74,0	36,6
8G-10FJX90S	1	12,7	7/8-14	25,4	31,2	94,5	57,0
8G-10FJX90L	1/2	12,7	7/8-14	25,4	65,3	80,1	42,7
10G-10FJX90S	5/8	15,8	7/8-14	25,4	31,2	85,5	48,0
10G-10FJX90L	5/8	15,8	7/8-14	25,4	65,3	81,0	43,5
10G-12FJX90S	5/8	15,8	1.1/16-12	31,7	46,2	95,8	58,3
12G-12FJX90S	3/4	19,0	1.1/16-12	31,7	46,2	108,0	57,2
12G-12FJX90L	3/4	19,0	1.1/16-12	31,7	94,7	97,2	46,2
12G-14FJX90S	3/4	19,0	1.3/16-12	34,9	50,8	124,0	73,0
12G-14FJX90L	3/4	19,0	1.3/16-12	34,9	99,6	105,0	54,0
16G-16FJX90S	1	25,4	1.5/16-12	38,1	56,6	129,9	73,1
16G-16FJX90L	1	25,4	1.5/16-12	38,1	110,0	114,9	58,1

**Terminal Prensável
MegaCrimp®**
Macho Fixo Face Plana com "O" Ring


S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4MFFOR	1/4	6,35	9/16-18	15,8	48,5	22,5
4G-6MFFOR	1/4	6,35	11/16-16	19,0	51,0	25,0
6G-6MFFOR	3/8	9,53	11/16-16	19,0	52,5	24,6
6G-8MFFOR	3/8	9,53	13/16-16	22,2	54,5	26,8
8G-8MFFOR	1/2	12,7	13/16-16	22,2	63,5	28,0
8G-10MFFOR	1/2	12,7	1-14	27,0	68,5	31,0
10G-10MFFOR	5/8	15,8	1-14	27,0	68,5	31,0
10G-12MFFOR	5/8	15,8	1.3/16-12	31,7	72,0	34,5
12G-12MFFOR	3/4	19,0	1.3/16-12	31,7	85,5	34,5
12G-16MFFOR	3/4	19,0	1.7/16-12	38,1	85,5	34,5
16G-16MFFOR	1	25,4	1.7/16-12	38,1	94,0	37,2

**Terminal Prensável
MegaCrimp®**
Fêmea Giratória Face Plana com "O" Ring


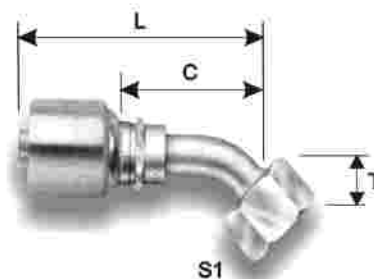

S1

S2

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	Sextavado S2	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)
4G-4FFORX	1/4	6,35	9/16-18	14,3	17,4	54,5	28,5
4G-8FFORX	1/4	6,35	11/16-16	15,8	20,6	57,0	31,0
6G-6FFORX	3/8	9,53	11/16-16	15,8	20,6	59,0	31,0
6G-8FFORX	3/8	9,53	13/16-16	19,0	23,8	64,0	36,1
8G-8FFORX	1/2	12,7	11/16-16	20,6	20,6	69,5	32,0
8G-8FFORX	1/2	12,7	13/16-16	20,6	23,8	73,5	36,0
8G-10FFORX	1/2	12,7	1-14	23,8	28,5	81,5	44,0
8G-12FFORX	1/2	12,7	1.3/16-12	23,8	34,9	84,3	46,8
10G-10FFORX	5/8	15,8	1-14	25,4	28,5	81,5	44,0
10G-12FFORX	5/8	15,8	1.3/16-12	23,8	34,9	84,3	46,8
12G-10FFORX	3/4	19,0	1-14	27,0	28,5	95,5	44,5
12G-12FFORX	3/4	19,0	1.3/16-12	27,0	34,9	110,8	59,8
12G-16FFORX	3/4	19,0	1.7/16-12	28,5	41,2	101,4	50,4
16G-16FFORX	1	25,4	1.7/16-12	34,9	41,2	113,4	56,6
18G-20FFORX	1	25,4	1.11/16-12	34,9	47,6	113,4	56,6
20G-20FFORX	1.1/4	31,7	1.11/16-12	44,4	47,6	114,4	55,4

Fêmea Giratória Face Plana com "O" Ring - Curva 45°



Terminal Prensável
MegaCrimp®





Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G - 4FFORX45	1/4	6,35	9/16-18	0,5	10,4	63,4	37,4
4G - 6FFORX45	1/4	6,35	11/16-16	0,5	10,9	66,0	40,0
5G - 6FFORX45	5/16	7,9	11/16-16	0,625	10,9	69,3	41,3
6G - 4FFORX45S	3/8	9,5	9/16-18	0,625	10,0	66,1	38,1
6G - 6FFORX45	3/8	9,53	11/16-16	0,625	10,9	70,5	42,6
6G - 8FFORX45	3/8	9,53	13/16-16	0,625	15,0	78,7	50,8
8G - 8FFORX45	1/2	12,7	13/16-16	—	15,0	89,5	52,1
8G - 10FFORX45	1/2	12,7	1-14	0,8125	16,5	89,3	51,9
8G - 12FFORX45	1/2	12,7	13/16-12	0,9375	21,0	110,3	72,9
10G - 10FFORX45	5/8	15,8	1-14	0,9375	16,5	88,9	51,4
10G - 12FFORX45	5/8	15,8	1.3/16-12	0,9375	21,1	99,0	61,5
12G - 10FFORX45	3/4	19,0	1-14	1,0625	16,5	101,6	50,6
12G - 12FFORX45	3/4	19,0	1.3/16-12	1,1875	21,1	118,5	67,5
12G - 16FFORX45	3/4	19,0	1.7/16-12	1,0625	23,9	133,0	82,0
16G - 16FFORX45	1	25,4	1.7/16-12	1,375	23,9	129,1	72,3
20G - 20FFORX45	1 1/4	31,7	1 11/16-12	1,75	25,4	148,0	89,0

Fêmea Giratória Face Plana com "O" Ring - Curva 90°



Terminal Prensável
MegaCrimp®





Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1 (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-4FFORX90S	1/4	6,35	9/16-18	17,5	20,80	60,4	34,40
4G-4FFORX90L	1/4	6,35	9/16-18	17,5	45,70	55,2	29,20
4G-8FFORX90S	1/4	6,35	11/16-16	20,6	22,90	61,6	35,60
4G-8FFORX90L	1/4	6,35	11/16-16	20,6	54,10	58,5	32,50
6G-6FFORX90S	3/8	9,53	11/16-16	20,6	22,90	66,1	38,20
6G-6FFORX90L	3/8	9,53	11/16-16	20,6	54,10	62,9	35,00
6G-8FFORX90S	3/8	9,53	13/16-18	23,8	29,20	72,6	44,70
6G-8FFORX90L	3/8	9,53	13/16-16	23,8	63,80	66,3	38,40
8G-8FFORX90S	1/2	12,70	13/16-16	23,8	29,20	83,5	46,00
8G-8FFORX90L	1/2	12,70	13/16-16	23,8	63,80	77,1	39,60
8G-10FFORX90S	1/2	12,70	1-14	28,5	32,26	85,8	48,26
8G-10FFORX90L	1/2	12,70	1-14	28,5	70,10	77,9	40,40
10G-10FFORX90S	5/8	15,88	1-14	28,5	32,30	85,6	48,10
10G-10FFORX90L	5/8	15,88	1-14	28,5	70,10	77,5	40,00
10G-12FFORX90S	5/8	15,88	1.3/16-12	34,9	47,80	95,8	58,30
12G-12FFORX90S	3/4	19,05	1.3/16-12	34,9	47,80	108,2	57,20
12G-12FFORX90L	3/4	19,05	1.3/16-12	34,9	96,00	102,0	51,00
12G-16FFORX90S	3/4	19,05	1.7/16-12	41,2	56,10	118,5	67,50
16G-16FFORX90S	1	25,40	1.7/16-12	41,2	56,10	129,9	73,10
16G-16FFORX90L	1	25,40	1.7/16-12	41,2	114,3	115,0	58,20

**Terminal Prensável
MegaCrimp®**
Macho Giratório SAE Invertido


Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4MIX	1/4	6,35	7/16-24	12,7	63,9	37,9
4G-5MIX	1/4	6,35	1/2-20	12,7	63,9	37,9
6G-5MIX	3/8	9,53	1/2-20	15,8	64,9	37,0
6G-6MIX	3/8	9,53	5/8-18	15,8	69,9	42,0
6G-7MIX	3/8	9,53	11/16-18	15,8	70,0	42,1
8G-8MIX	1/2	12,7	3/4-16	20,6	83,8	46,3

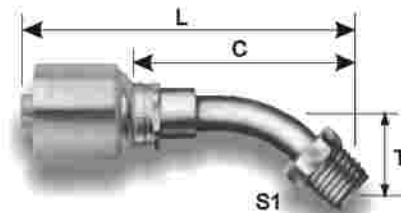**Terminal Prensável
MegaCrimp®**
Macho Giratório SAE Invertido - Curva 45°




Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	T	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)
6G-4MIX45	3/8	9,53	7/16-24	11,1	25,4	80,5	52,6
6G-5MIX45	3/8	9,53	1/2-20	12,7	25,4	79,5	51,6
6G-6MIX45	3/8	9,53	5/8-18	15,8	25,4	84,3	56,4
6G-7MIX45	3/8	9,53	11/16-18	17,4	25,4	86,0	58,1

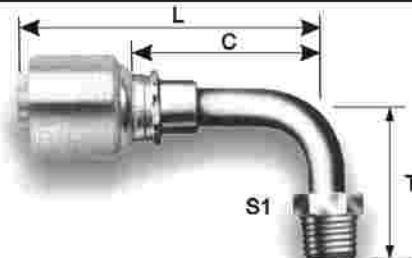**Terminal Prensável
MegaCrimp®**
Macho Giratório SAE Invertido - Curva 90°


Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	T	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)
4G-4MIX90	1/4	6,35	7/16-24	11,1	35,10	59,2	33,2
4G-5MIX90	1/4	6,35	1/2-20	12,7	35,10	62,5	36,5
6G-4MIX90	3/8	9,53	7/16-24	11,1	35,10	62,0	34,1
6G-5MIX90	3/8	9,53	1/2-20	12,7	35,10	63,5	35,6
6G-6MIX90	3/8	9,53	5/8-18	15,8	35,10	71,0	43,1
6G-7MIX90	3/8	9,53	11/16-18	17,4	35,10	71,0	43,1
8G-8MIX90	1/2	12,70	3/4-16	19,0	41,70	83,5	46,0

Macho Fixo BSPT Vedação 30°

Terminal Prensável
MegaCrimp®





S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4MBSPT	1/4	6,35	1/4-19	14	47,9	24,7
6G-6MBSPT	3/8	9,53	3/8-19	19	49,5	26,0
8G-8MBSPT	1/2	12,7	1/2-14	22	63,3	30,9
12G-12MBSPT	3/4	19,0	3/4-14	32	74,1	35,7
16G-16MBSPT	1	25,4	1-11	36	87,5	41,6

Macho Fixo BSPP 30°



Terminal Prensável
MegaCrimp®



S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4BSPP	1/4	6,4	1/4-19	19	53,5	27,5
6G-6BSPP	3/8	9,5	3/8-19	22	55,0	27,1
8G-8BSPP	3/8	9,5	1/2-14	27	60,0	32,1
8G-8BSPP	1/2	12,7	1/2-14	27	69,0	31,5
10G-10BSPP	5/8	15,8	5/8-14	30	73,5	36,0
12G-12BSPP	3/4	19,0	3/4-14	32	85,0	34,0
16G-16BSPP	1	25,4	1-11	41	101,0	44,2



Terminal Prensável
 MegaCrimp®

Fêmea Giratória BSPP Vedação 30° com "O" Ring


S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
4G-4FBSPORX	1/4	6,35	1/4-19	19	38,9	16,0
4G-6FBSPORX	1/4	6,35	3/8-19	22	39,9	17,0
5G-6FBSPORX	5/16	7,9	3/8-19	22	42,2	18,1
5G-8FBSPORX	5/16	7,9	1/2-14	27	54,8	26,8
6G-6FBSPORX	3/8	9,52	3/8-19	22	40,0	16,9
6G-8FBSPORX	3/8	9,52	1/2-14	27	40,2	17,1
8G-6FBSPORX	1/2	12,7	3/8-14	22	66,5	29,0
8G-8FBSPORX	1/2	12,7	1/2-14	27	49,5	17,0
8G-10FBSPORX	1/2	12,7	5/8-14	27	68,0	30,5
10G-10FBSPORX	5/8	15,8	5/8-14	30	48,8	19,1
10G-12FBSPORX	5/8	15,8	3/4-14	32	50,6	20,8
12G-12FBSPORX	3/4	19,0	3/4-14	32	59,5	21,0
12G-16FBSPORX	3/4	19,0	1-11	41	87,0	36,0
16G-16FBSPORX	1	25,4	1-11	41	70,1	25,2
20G-20FBSPORX	1.1/4	31,7	1.1/4-11	50	75,5	29,5

 Terminal Prensável
 MegaCrimp®



Fêmea Giratória BSPP Vedação 30° com "O" Ring - Curva 90°


S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	T	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)
4G-4FBSPORX90	1/4	6,35	1/4-19	19	23,5	49,4	26,5
6G-6FBSPORX90	3/8	9,53	3/8-19	22	32,0	57,0	34,0
6G-8FBSPORX90	3/8	9,5	1/2-14	27	32,0	57,0	34,0
8G-8FBSPORX90	1/2	12,7	1/2-14	27	37,5	73,0	40,5
10G-10FBSPORX90	5/8	15,8	5/8-14	30	46,0	76,3	46,6
12G-12FBSPORX90	3/4	19,0	3/4-14	32	60,0	94,5	56,0
16G-16FBSPORX90	1	24,4	1-11	41	70,0	119,2	74,3

Macho DIN 24° - Leve



Terminal Prensável
MegaCrimp®



Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo (mm)	Sextavado S1 (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-6MDL	1/4	6,35	M12X1,5	6	14,00	19,8	42,9
4G-8MDL	1/4	6,35	M14X1,5	8	17,00	24,0	50,0
4G-10MDL	1/4	6,35	M16X1,5	10	17,00	25,0	51,0
6G-10MDL	3/8	9,53	M16X1,5	10	17,00	24,8	52,5
6G-12MDL	3/8	9,53	M18X1,5	12	19,00	24,8	52,5
8G-15MDL	1/2	12,70	M22X1,5	15	24,00	27,5	65,0
10G-18MDL	5/8	15,88	M26X1,5	18	27,00	27,5	65,0
12G-22MDL	3/4	19,05	M30X2,0	22	32,00	32,0	83,0


Fêmea Giratória DIN 24° com "O" Ring - Leve

Terminal Prensável
MegaCrimp®



Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo (mm)	Sextavado S1 (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-6FDLORX	1/4	6,35	M12X1,5	6	14	46,7	25,8
4G-8FDLORX	1/4	6,35	M14X1,5	8	17	51,32	28,4
4G-10FDLORX	1/4	6,35	M16X1,5	10	19	55,22	29,3
4G-12FDLORX	1/4	6,35	M18X1,5	12	22	52,62	29,7
5G-10FDLORX	5/16	7,9	M16X1,5	10	19	53,9	29,7
5G-12FDLORX	5/16	7,9	M18X1,5	12	22	54,1	29,9
6G-10FDLORX	3/8	9,52	M16X1,5	10	19	52,26	29,2
6G-12FDLORX	3/8	9,5	M18X1,5	12	22	52,96	29,9
8G-15FDLORX	1/2	12,70	M22X1,5	15	27	61,79	29,3
10G-18FDLORX	5/8	15,87	M26X1,5	18	32	60,04	30,3
12G-18FDLORX	3/4	19,0	M30X2,0	18	32	68,5	30,0
12G-22FDLORX	3/4	19,0	M30X2,0	22	36	70,8	32,3
16G-28FDLORX	1	25,4	M36X2,0	28	41	81,6	36,7
20G-35FDLORX	1 1/4	31,7	M45X2,0	35	51	90,4	44,1



Terminal Prensável
 MegaCrimp®

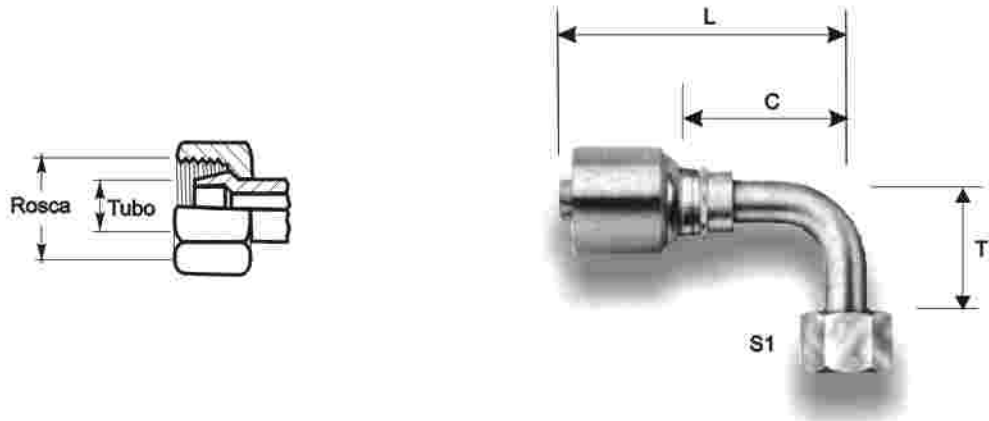Fêmea Giratória DIN 24° com O'Ring - leve 90°


Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo	Sextavado S1	T	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)	(mm)
4G-6FDLORX90	1/4	6,4	M12X1,5	8	14	35,0	54,5	31,5
4G-8FDLORX90	1/4	6,4	M14X1,5	8	17	35,0	54,5	31,5
4G-10FDLORX90	1/4	6,4	M16X1,5	10	19	36,5	54,4	31,5
5G-10FDLORX90	5/16	9,5	M16X1,5	10	19	36,5	58,6	34,4
6G-10FDLORX90	3/8	9,5	M16X1,5	10	19	36,5	55,3	32,2
6G-12FDLORX90	3/8	9,5	M18X1,5	12	22	37,0	55,3	32,2
8G-15FDLORX90	1/2	12,7	M22X1,5	15	27	42,0	72,9	40,4
10G-18FDLORX90	5/8	15,8	M26X1,5	18	32	51,5	77,3	47,6
12G-22FDLORX90	3/4	19,0	M30X2,0	22	36	62,0	94,8	56,3
18G-28FDLORX90	1	25,4	M36X2,0	28	41	70,0	119,2	74,3
20G-35FDLORX90	1 1/4	31,7	M45X2,0	35	51	80,0	128,8	82,8

Macho DIN 24° - Pesado

Terminal Prensável
MegaCrimp®





S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo (mm)	Sextavado S1 (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-8MDH	1/4	6,4	M16X1,5	8	17	53,0	27,0
4G-10MDH	1/4	6,4	M18X1,5	10	19	52,5	26,5
6G-10MDH	3/8	9,53	M18X1,5	10	19	52,5	24,8
6G-12MDH	3/8	9,53	M20X1,5	12	24	57,5	29,6
6G-14MDH	3/8	9,53	M22X1,5	14	24	59,5	31,6
8G-12MDH	1/2	12,7	M18X1,5	12	24	61,5	29,0
8G-16MDH	1/2	12,70	M24X1,5	18	27	69,0	31,5
10G-20MDH	5/8	15,88	M30X2,0	20	32	73,5	36,0

Fêmea Giratória DIN 24° com "O" Ring Pesada



Terminal Prensável
MegaCrimp®



S1

Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo (mm)	Sextavado S1 (mm)	L (mm)	C (mm)
	(pol)	(mm)					
4G-8FDHORX	1/4	6,4	M16X1,5	8	19	51,3	28,4
4G-10FDHORX	1/4	6,4	M18X1,5	10	22	52,2	29,3
5G-12FDHORX	5/16	7,9	M20X1,5	12	24	58,0	30,0
5G-14FDHORX	5/16	7,9	M22X1,5	14	27	53,8	30,0
6G-10FDHORX	3/8	9,5	M18X1,5	10	22	52,3	29,2
6G-12FDHORX	3/8	9,5	M20X1,5	12	24	53,0	29,9
6G-14FDHORX	3/8	9,5	M22X1,5	14	27	55,8	32,5
8G-12FDHORX	1/2	12,7	M20X1,5	12	24	70,2	32,7
8G-14FDHORX	1/2	12,7	M22X1,5	14	27	65,0	32,5
8G-16FDHORX	1/2	12,7	M24X1,5	16	30	66,1	33,6
10G-20FDHORX	5/8	15,8	M30X2,0	20	36	67,9	38,2
12G-20FDHORX	3/4	19,0	M30X2,0	20	36	76,0	37,5
12G-25FDHORX	3/4	19,0	M36X2,0	25	46	81,1	42,6
16G-25FDHORX	1	25,4	M42X2,0	25	46	102,5	45,7
16G-30FDHORX	1	25,4	M42X2,0	30	50	94,1	49,2


Terminal Prensável
 MegaCrimp®

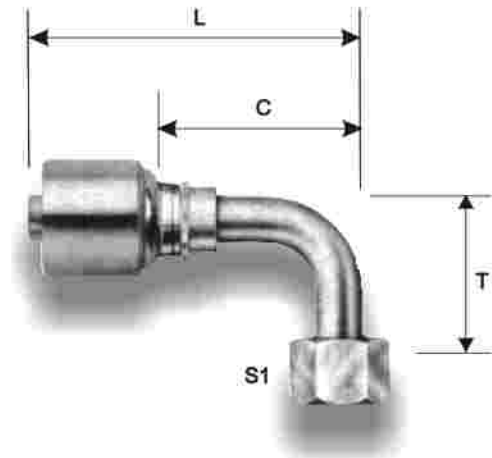Fêmea Giratória DIN 24° com O'Ring - pesada 90°


Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Diâmetro do Tubo	Sextavado S1	T	L	C
	(pol)	(mm)				(mm)	(mm)	(mm)
4G-8FDHORX90	1/4	6,4	M16X1,5	8	19	35,0	54,5	31,5
4G-10FDHORX90	1/4	6,4	M18X1,5	10	22	36,5	54,5	31,5
5G-12FDHORX90	5/16	7,9	M20X1,5	12	24	37,0	59,0	31,0
5G-14FDHORX90	5/16	7,9	M22X1,5	14	24	40,0	54,6	31,0
6G-10FDHORX90	3/8	9,5	M18X1,5	10	22	38,5	55,3	32,2
6G-12FDHORX90	3/8	9,5	M20X1,5	12	24	37,0	55,3	32,2
6G-14FDHORX90	3/8	9,5	M22X1,5	14	27	40,0	55,3	32,2
8G-16FDHORX90	1/2	12,7	M24X1,5	16	30	44,0	72,9	40,4
10G-20FDHORX90	5/8	15,8	M30X2,0	20	36	51,0	76,3	46,6
10G-25FDHORX90	5/8	15,8	M36X2,0	25	46	64,0	76,3	46,6
12G-20FDHORX90	3/4	19,0	M30X2,0	20	36	51,0	87,8	49,3
12G-25FDHORX90	3/4	19,0	M36X2,0	25	46	64,0	94,8	56,3

Ponta Lisa (Tubo Métrico)


Terminal Prensável
MegaCrimp®

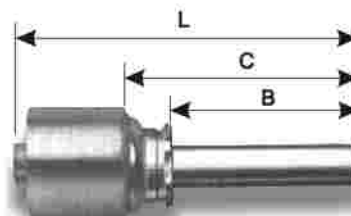


Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro do Tubo (mm)	Sextavado S1 (mm)	L (mm)	C (mm)	B (mm)
	(pol)	(mm)					
4G-6MLSP	1/4	6,35	6	12,7	57,0	31,0	22,0
4G-8MLSP	1/4	6,35	8	12,7	57,0	31,0	22,0
6G-10MLSP	3/8	9,53	10	15,8	59,5	31,6	23,0
6G-12MLSP	3/8	9,50	12	15,8	59,5	31,6	23,0
8G-15MLSP	1/2	12,70	15	20,6	71,5	34,0	25,0
12G-18MLSP	3/4	19,05	18	27,0	87,5	36,5	26,0
12G-22MLSP	3/4	19,05	22	27,0	89,0	38,0	28,0
16G-28MLSP	1	25,40	28	36,5	99,0	42,2	30,0

Flange SAE Cód.61 - Reto


Terminal Prensável
MegaCrimp®

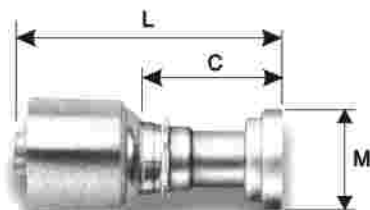

Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro Nominal do Flange	L (mm)	C (mm)	M (mm)
	(pol)	(mm)				
8G-8FL	1/2	12,7	1/2	80,0	42,5	30,2
8G-10FL	1/2	12,7	5/8	80,0	42,5	34,2
8G-12FL	1/2	12,7	3/4	80,0	42,5	38,1
10G-10FL	5/8	15,9	5/8	119,0	61,5	34,2
12G-12FL	3/4	19,0	3/4	98,0	47,0	38,1
12G-16FL	3/4	19,0	1	88,8	37,8	44,5
16G-16FL	1	25,4	1	96,0	39,2	44,5
16G-20FL	1	25,4	1.1/4	96,0	39,2	50,8
20G-20FL	1.1/4	31,7	1.1/4	112,5	53,5	50,8
20G-24FL	1.1/4	31,7	1.1/2	117,5	58,5	60,5

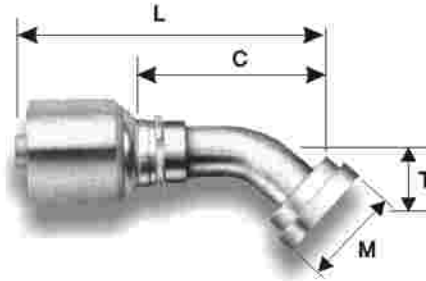**Terminal Prensável
MegaCrimp®**
Flange SAE Cód.61 - Curva 45°




Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro da Flange (pol)	T (mm)	L (mm)	C (mm)	M (mm)
	(pol)	(mm)					
8G-8FL45	1/2	12,7	1/2	19,8	94,0	56,5	30,2
8G-12FL45	1/2	12,7	3/4	19,8	94,0	56,5	38,1
10G-10FL45	5/8	15,9	5/8	26,0	106,5	69,0	34,1
12G-12FL45	3/4	19,0	3/4	25,4	118,5	67,5	38,1
12G-16FL45	3/4	19,0	1	25,4	118,5	67,5	44,4
16G-16FL45	1	25,4	1	26,9	129,7	72,9	44,4
16G-20FL45	1	25,4	1.1/4	26,9	129,5	72,7	50,8
20G-20FL45	1.1/4	31,7	1.1/4	29,2	142,0	83,0	50,8

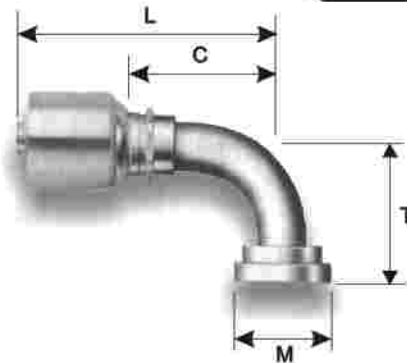**Terminal Prensável
MegaCrimp®**
Flange SAE Cód.61 - Curva 90°


Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro da Flange (pol)	T (mm)	L (mm)	C (mm)	M (mm)
	(pol)	(mm)					
8G-8FL90	1/2	12,7	1/2	41,4	91,2	53,7	30,1
8G-12FL90	1/2	12,7	3/4	41,4	91,5	54,0	38,1
10G-10FLK90	5/8	15,9	5/8	55,0	99,0	61,5	34,1
10G-12FL90	5/8	15,9	3/4	58,0	100,0	62,5	38,1
12G-12FL90	1	19	3/4	54,1	111,7	60,7	38,1
12G-16FL90	1	19	1	54,1	111,7	60,7	44,4
16G-16FL90	1	25,4	1	60,5	128,1	71,3	44,4
16G-20FL90	1	25,4	1.1/4	60,5	128,1	71,3	50,8
20G-20FL90	1.1/4	31,7	1.1/4	66,5	137,5	78,5	50,8
20G-20FL90-102	1.1/4	31,7	1.1/4	101,0	138,0	79,0	50,8
20G-24FL90	1.1/4	31,7	1.1/2	66,5	144,0	85,0	60,5

Macho Fixo NPTF 30°



Terminal PowerCrimp®



Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
24-24MP	1 1/2	38,1	1.1/2" - 11 1/2"	50,8	122,7	55,6
32-32MP	2	50,8	2 - 11.1/2"	63,5	148,8	59,2

Macho Fixo JIC 37°



Terminal PowerCrimp®



Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	L	C
	(pol)	(mm)		(mm)	(mm)	(mm)
24-24MJ	1 1/2	38,1	17/8-12	50,8	124,7	57,7
32-32MJ	2	50,8	21/S2-12	66,7	158,5	66,8


Fêmea Giratória JIC 37°

Terminal PowerCrimp®




Descrição	Diâmetro Interno da Mangueira (DI)		Rosca	Sextavado S1	Sextavado S2	L	"C"
	(pol)	(mm)		(mm)	(mm)	(mm)	(mm)
24-24FJX	1 1/2	38,1	17/8-12	129,5	57,2	129,5	62,5
32-32FJX	2	50,8	21/S2-12	163,8	73,0	163,8	74,2

Terminal
PowerCrimp®

Flange reto - cód. 61


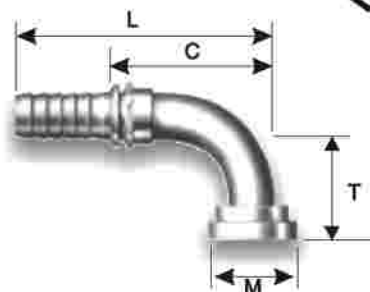
Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro da Flange (pol)	M (mm)	L (mm)	C (mm)
	(pol)	(mm)				
24-24FL	1 1/2	38,1	1 1/2	60,5	125,5	58,4
32-32FL	2	50,8	2	71,4	154,2	64,5

 Terminal
PowerCrimp®

Flange curva 45° - cód. 61


Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro da flange (pol)	M (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
24-24FL45	1 1/2	38,1	1 1/2	60,5	35,8	165,9	98,8
32-32FL45	2	50,8	2	71,4	50,8	216,2	126,5

 Terminal
PowerCrimp®

Flange curva 90° - cód. 61


Descrição	Diâmetro Interno da Mangueira (DI)		Diâmetro da flange (pol)	M (mm)	T (mm)	L (mm)	C (mm)
	(pol)	(mm)					
24-24FL90	1 1/2	38,1	1 1/2	60,5	79,2	157,2	90,2
32-32FL90	2	50,8	2	71,4	114,3	216,2	126,5

Capa No Skive (não descascável)

Capa PowerCrimp®

para terminais PowerCrimp (PC)



Descrição	Mangueira (DI)		Comprimento da capa (mm)	Capa (D.E.) (mm)
	(pol)	(mm)		
24PC1FS	1 1/2	38,1	68,32	68,33
32PC1FS	2	50,8	90,42	82,55

